

# SensePlus LED Color Bulb

(Model : MX-LB-01/ MX-LB-02)

## HKBN Smart User Guide



v.20210923

## Table of contents

Product Description .....	3
Download HKBN Smart App .....	4
Add Device.....	5
Control Device .....	9
- Introduction of Control Panel .....	9
- Switch On/Off.....	10
- Light Mode .....	11
- Countdown Timer.....	15
- Sleep and Wake Up Light Setting (Plan) .....	16
- Schedule .....	17
- Setup daily lighting arrangement (Rhythms).....	18
Scene (Smart Action) .....	21
Automation (Smart Action).....	23
Settings.....	26
- Page Layout .....	26
Product Specifications .....	29
Product Maintenance and Warranty.....	30

# Product Description

Name: SensePlus LED Color Bulb

Model: MX-LB-01/ MX-LB-02

Product Features:

1. Supports voice control, remotely control the bulb from your phone
2. Wide range of light colors



MX-LB-01  
(E27)



MX-LB-02  
(E14)

# Download HKBN Smart App



Search and download “HKBN Smart ” APP in Apple App Store OR Google Play Store

OR


Scan the QR code below




# Add Device

1. You must first connect your phone to a 2.4GHz Wi-Fi network when adding device;
2. Tap “Devices” on the bottom menu (image 1);
3. Tap “Add Device” button OR “+” icon at top right corner if you already have paired device (image 2);

(image 1)

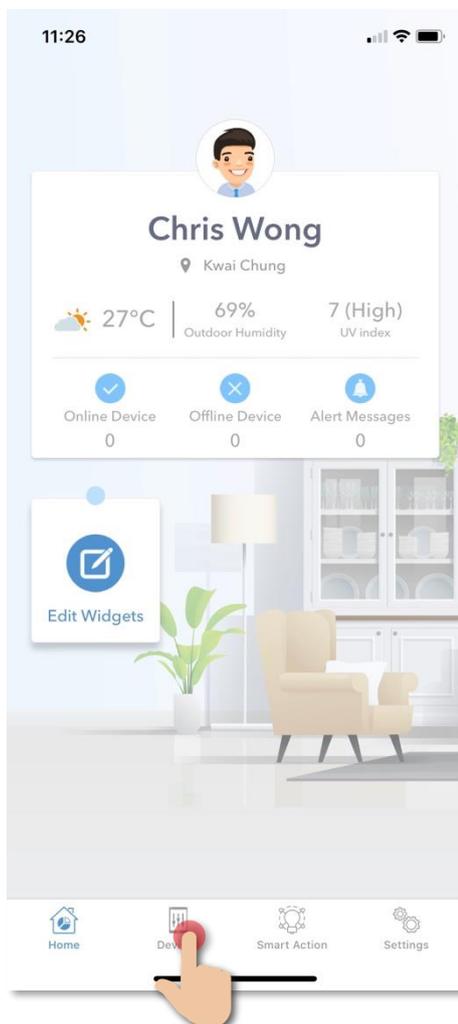

(image 2)

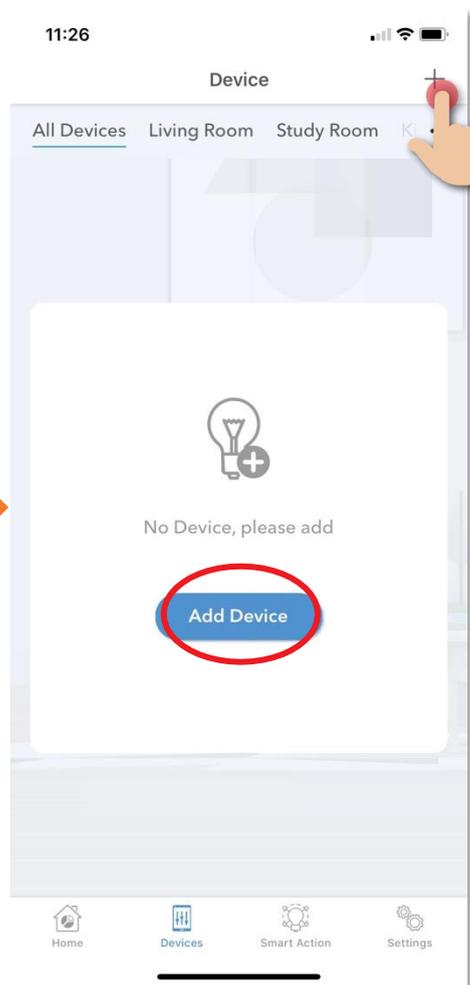

4. Tap “SensePlus LED Color Bulb (E27)” or “SensePlus LED Color Bulb (E14)” from left menu “Lighting” (image 3);
5. Power on the device, then quickly turn off and on the light bulb for 3 times;
6. Confirm that the light bulb blinks quickly (image 4);

(image 3)




(image 4)




7. Select Wi-Fi network and enter password\*, and then tap “Next”;
8. Please wait a moment while our device is in pairing process.

### \* Important tips: Wi-Fi requirement

- Currently all smart devices are compatible to **2.4GHz network** only. Please make sure that your device and mobile are connected with 2.4GHz but not 5GHz Wi-Fi network.
- If you have 2.4GHz and 5GH Wi-Fi channel and they are using same SSID, we suggest to edit it to different name before pairing. If you insist to use the same SSID on two channels, please turn off the 5GHz channel first before pairing.

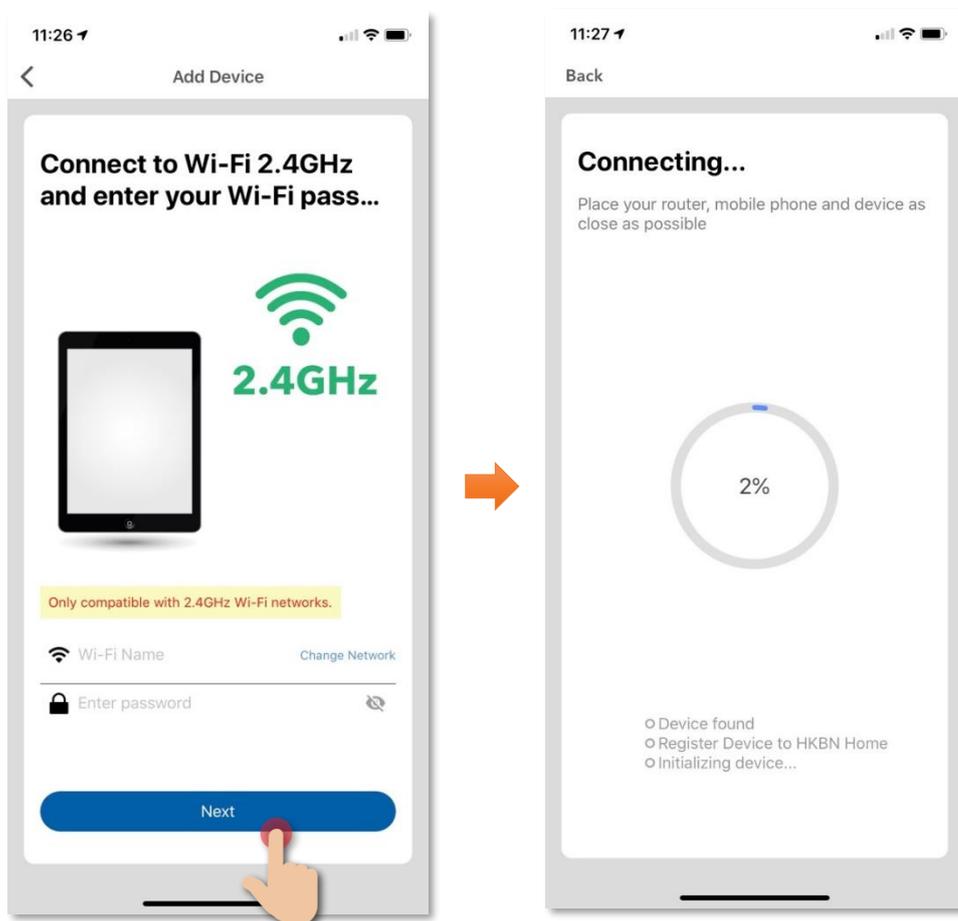


9. After device added successfully, you can change the device name and assign it to the located room. (You can also change the device name and room location later in device setting page and room management page.) And you can find the SensePlus LED Color Bulb in the “Device” page.

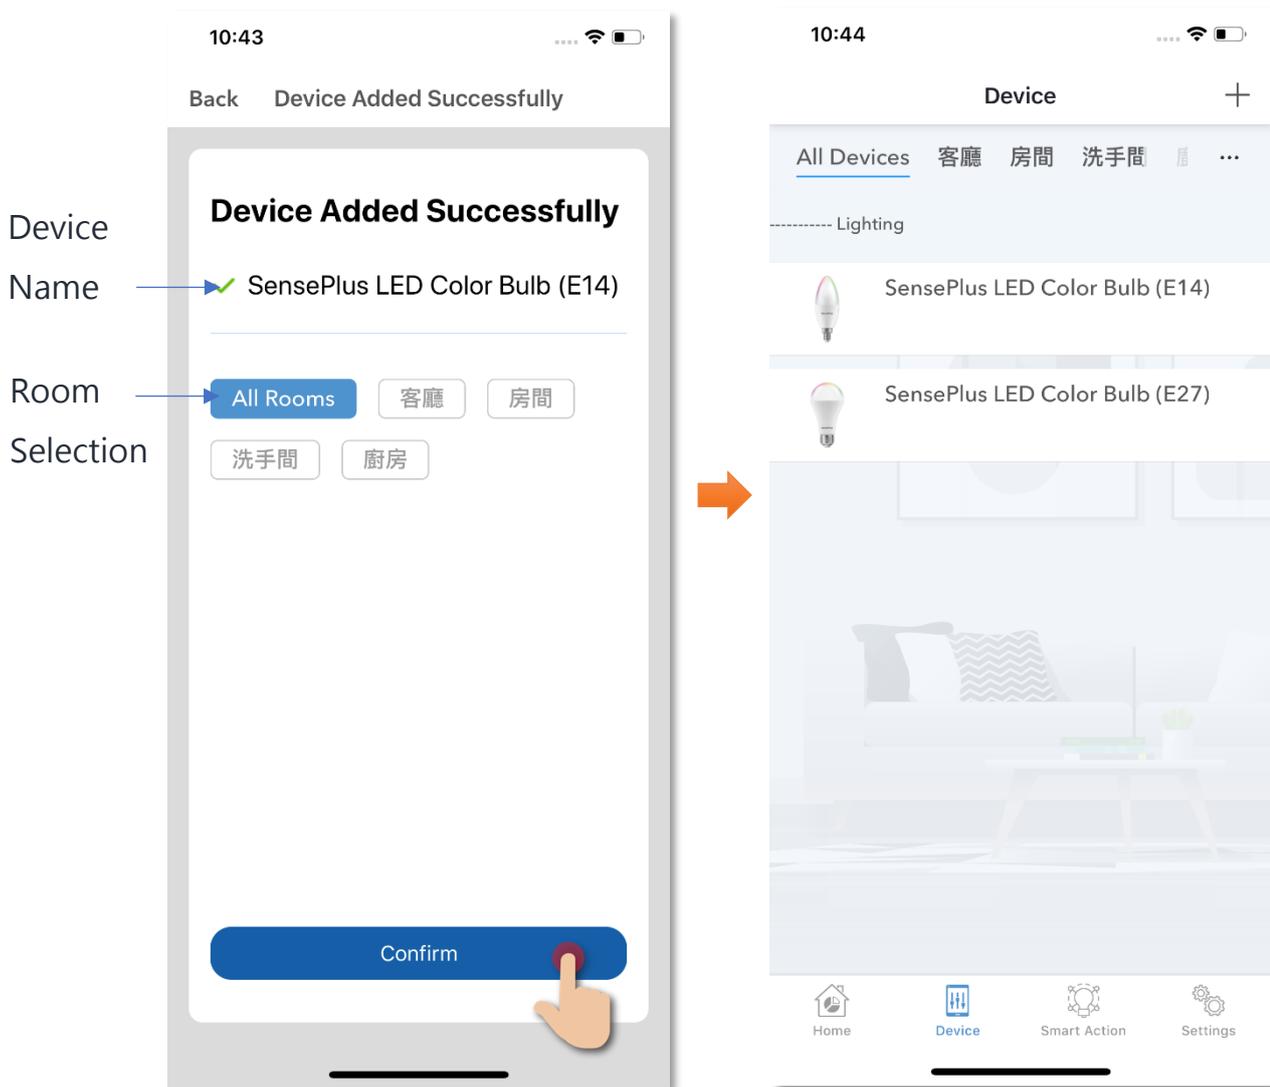


# Control Device

- Introduction of Control Panel

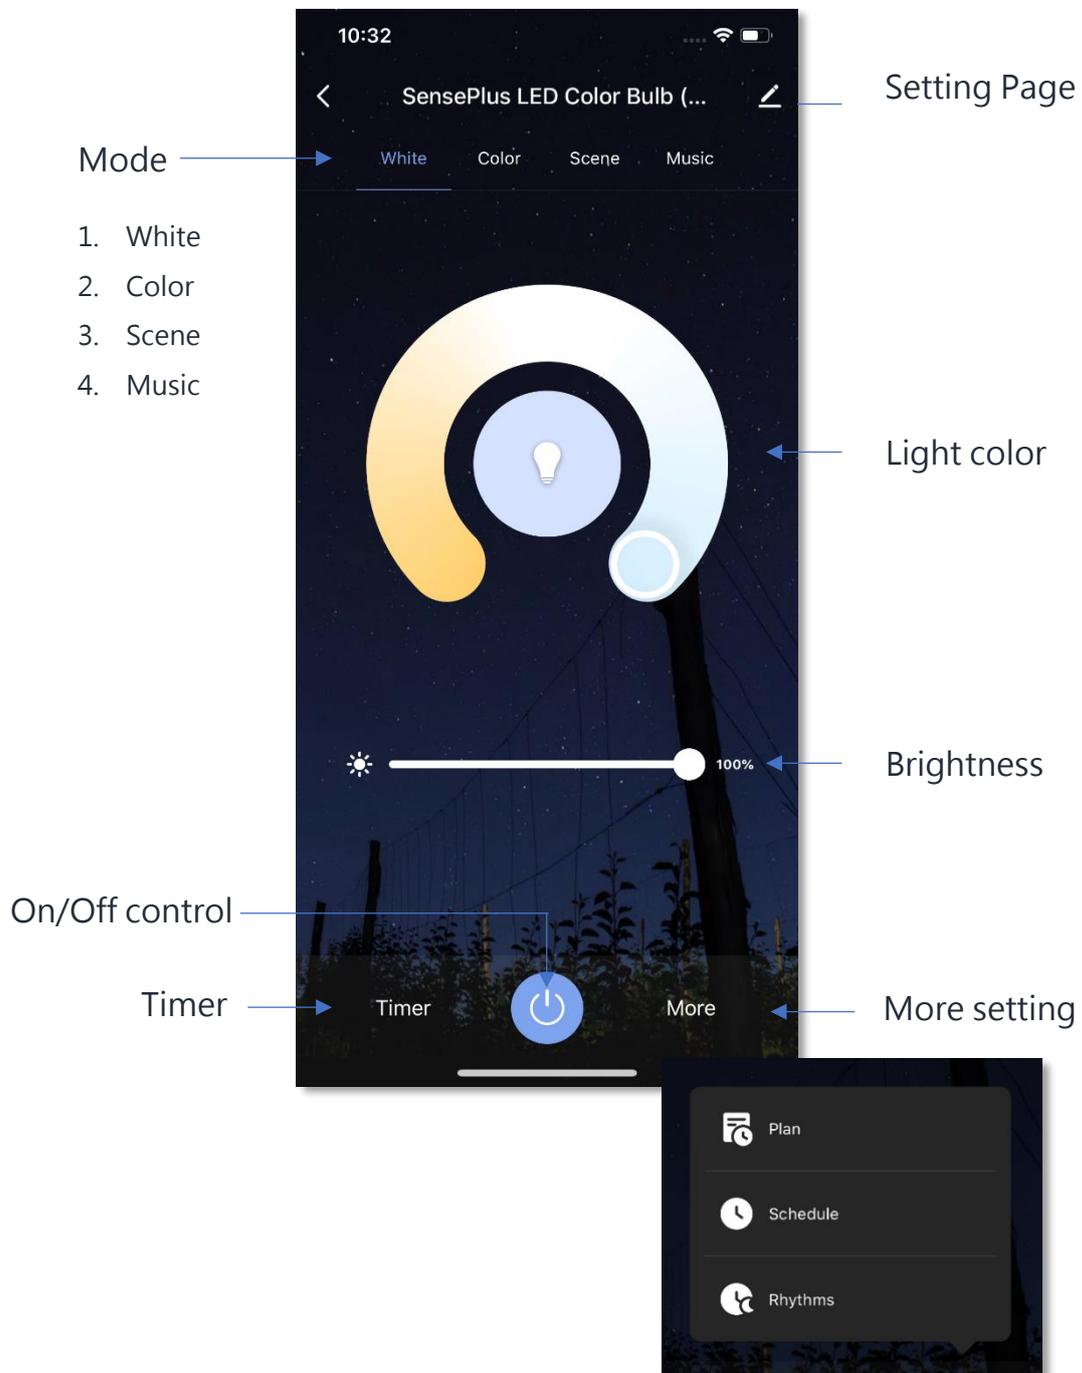

- **Switch On/Off**

You can press the “  ”key to turn on/off your SensePlus LED Color Bulb remotely.

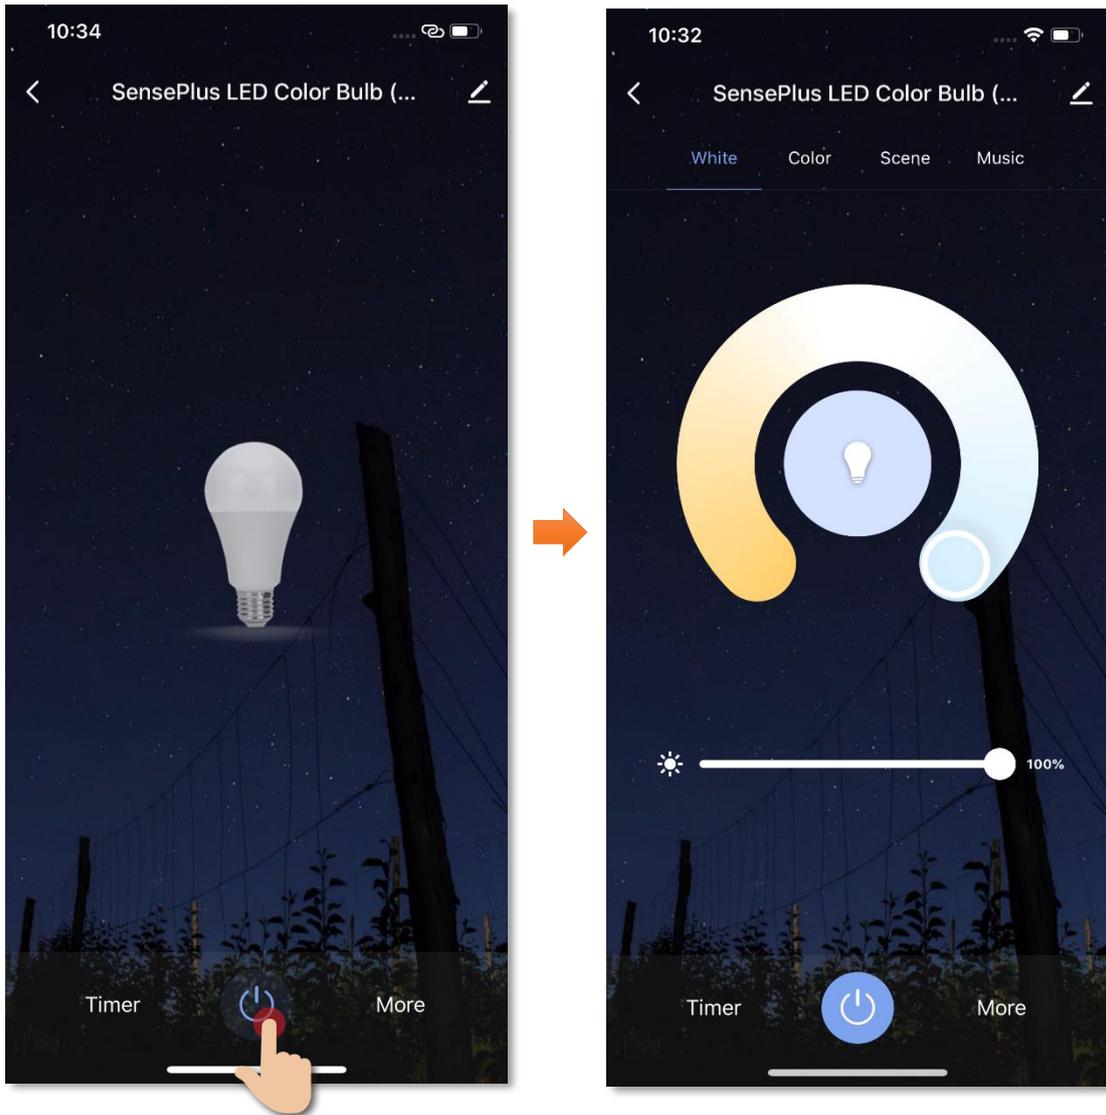


## • Light Mode

There are 4 light modes:

1. White
2. Color
3. Scene
4. Music


### White Mode

You can adjust the light color temperature by dragging the pointer of the perimeter.

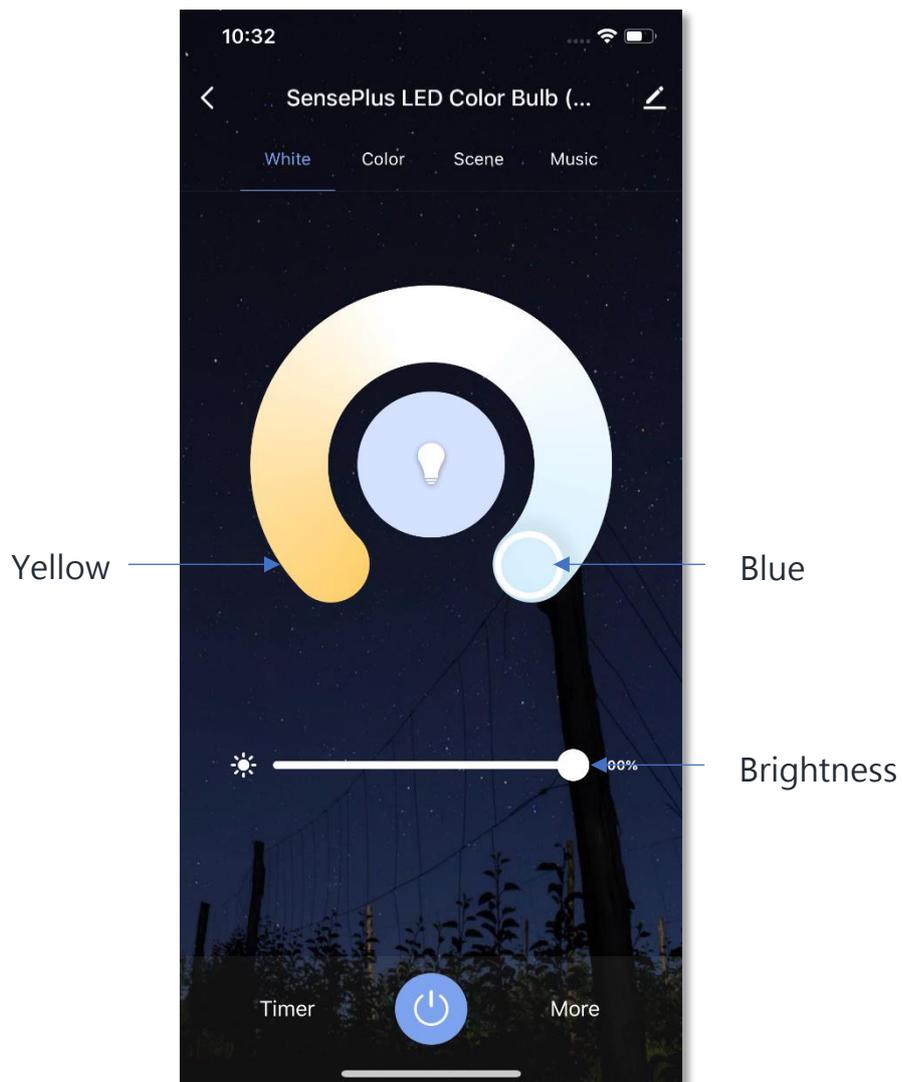


## Color Mode

You can change the light color by dragging the pointer of the peremeter.

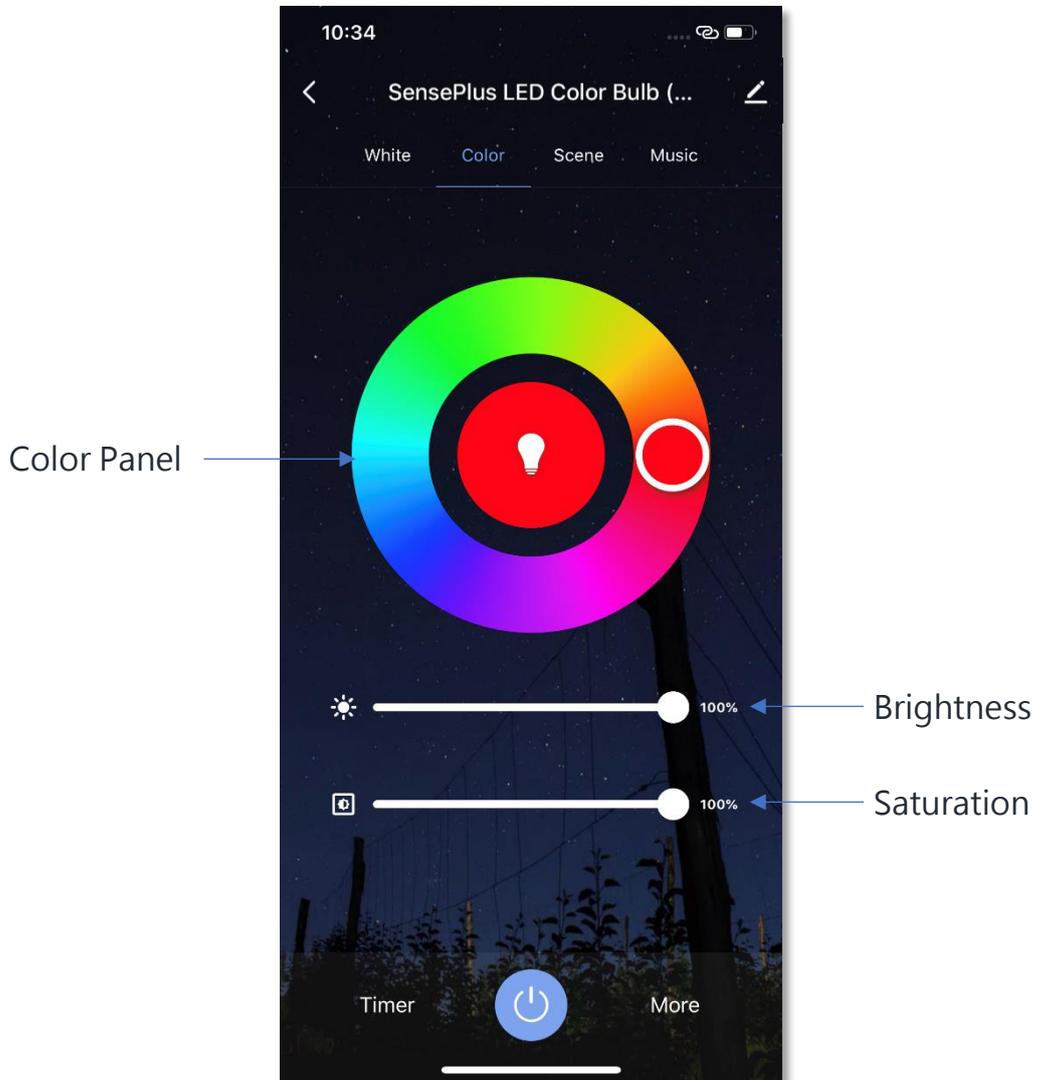


## Scene Mode

You can set different light for different scenes accordingly, you can choose the light color, flash mode and flash speed of the light.

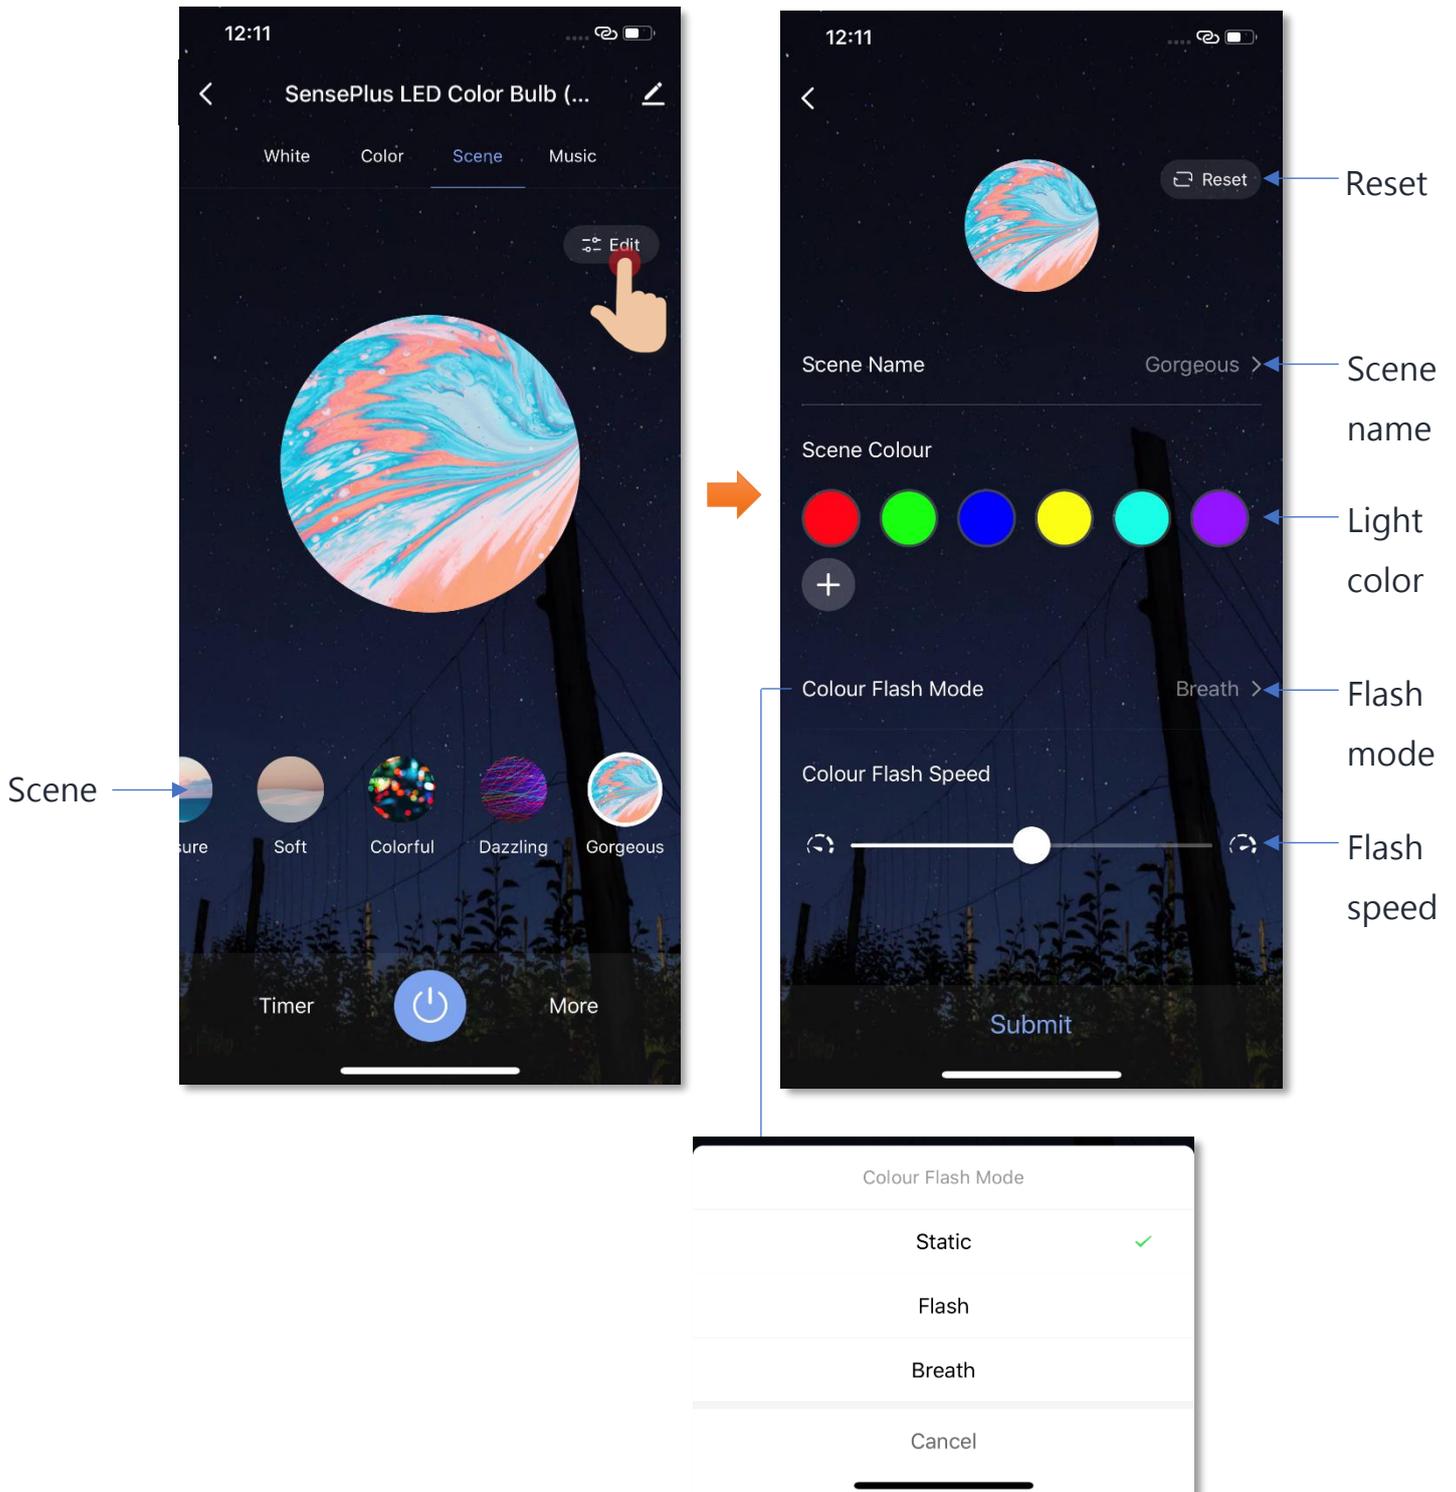


## Music Mode

The microphone will pick up the music playing, then automatically change the light color according to the music rhythm.

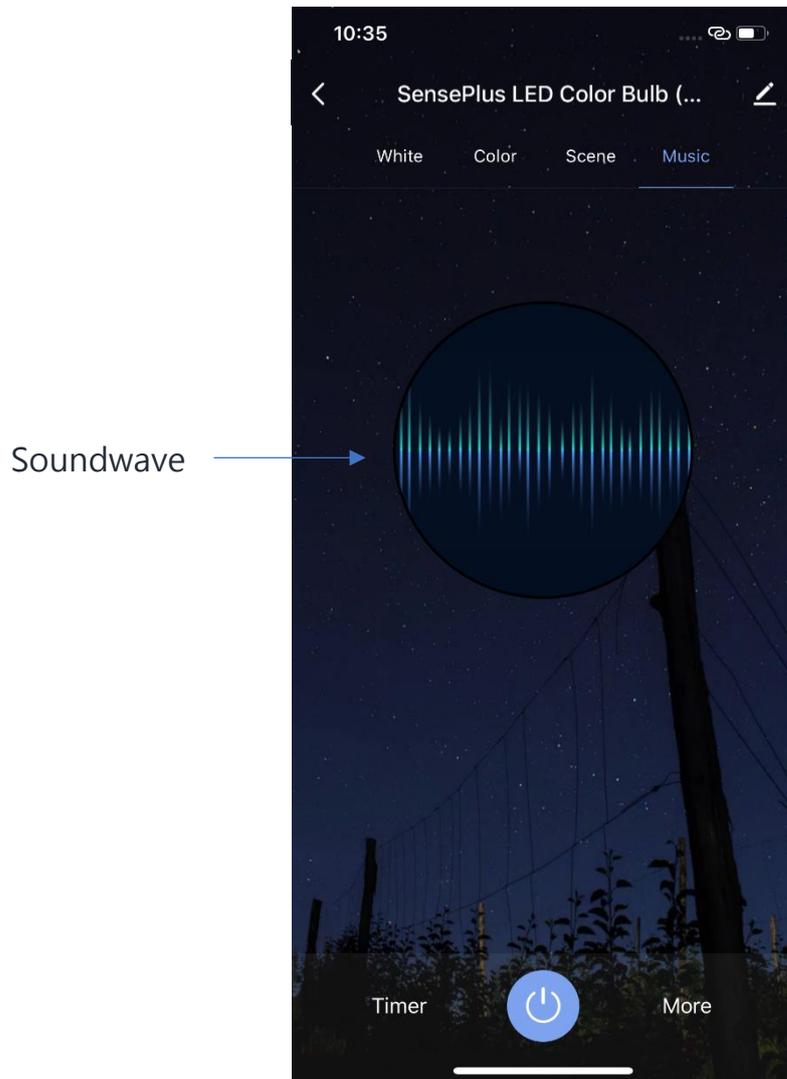

- **Countdown Timer**


You can set countdown timer to turn on and off your SensPlus Air Sterilizer

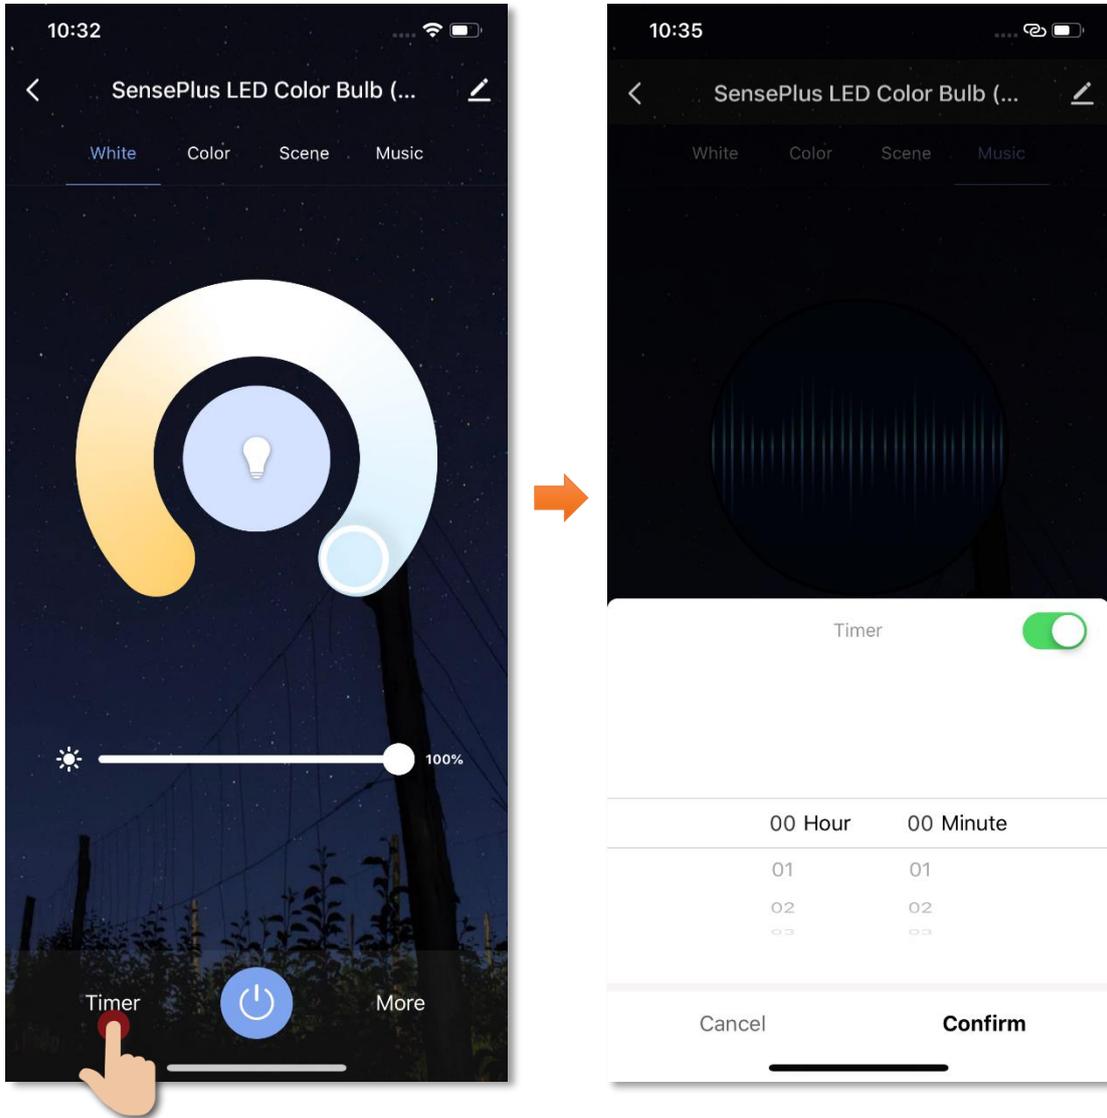

## • Sleep and Wake Up Light Setting (Plan)

“Sleep plan”: Fade-out light that helps you sleep better at night


“Wake up plan”: Fade-in light that slowly wakes you up

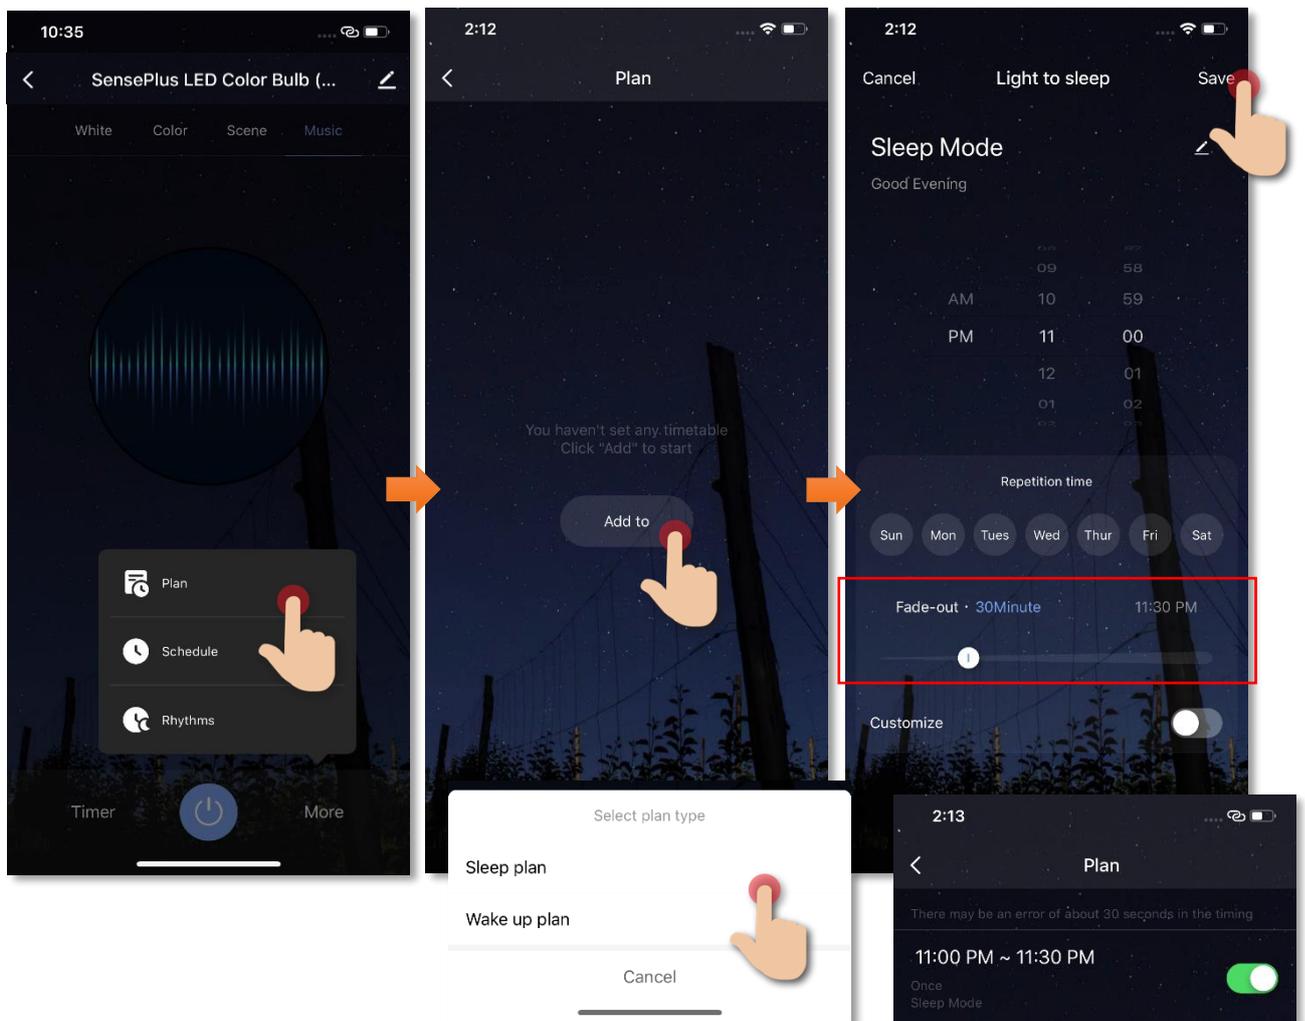

## • Schedule

You can set schedule to turn on/off automatically:

1. Tap “More” then “Schedule”;
2. Tap “Add”;
3. Set schedule to turn on/off the light bulb;

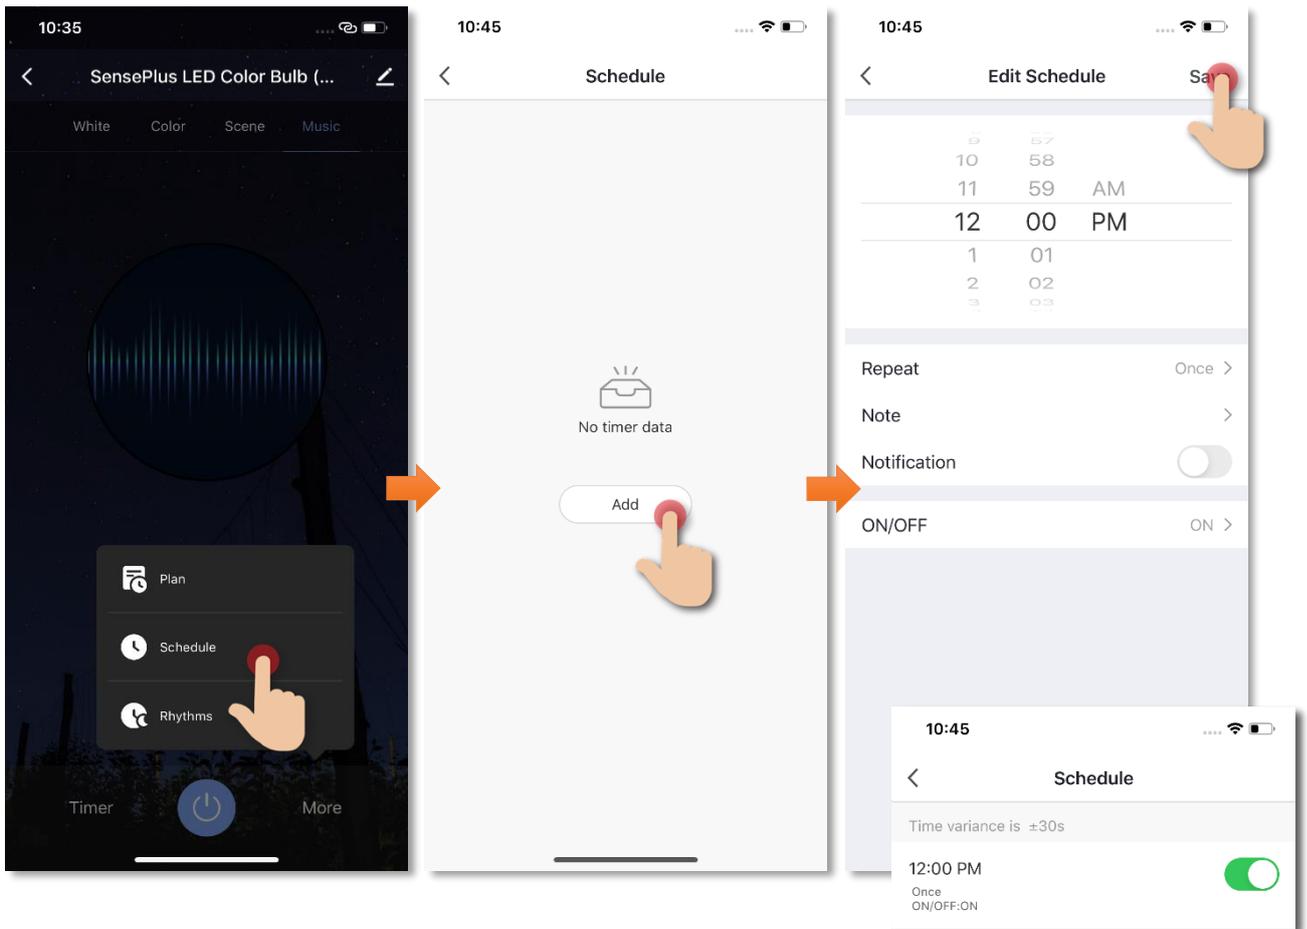


- **Setup daily lighting arrangement (Rhythms)**

You can set different light in different time slot of a day to match with your living rhythms. For example, soft and warm light when you awake, stronger and cool tone light during study time.


1. Tap “More”;
2. Then tap “Rhythms” for setting;

(image 1)

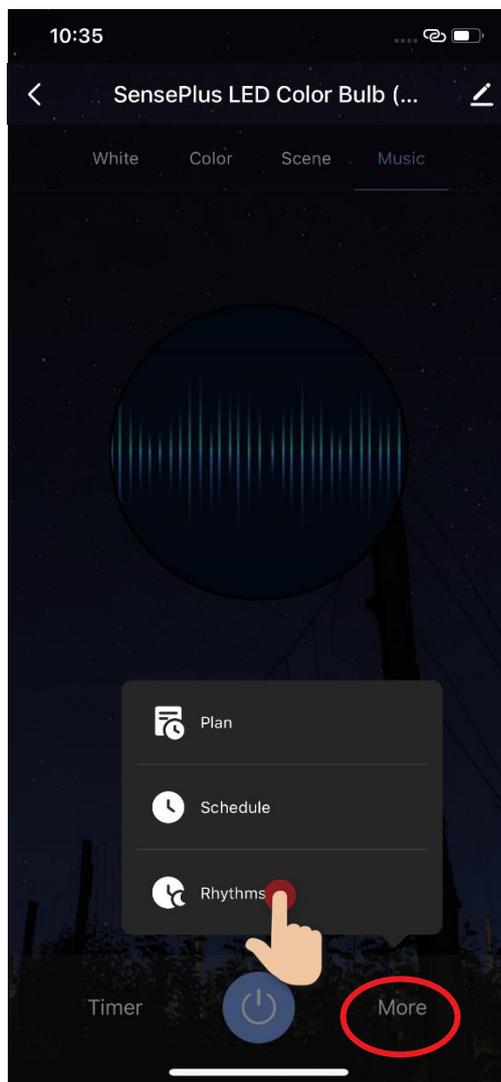


3. You can find the activated light in different time slots in the interface (image 2);

(image 2)

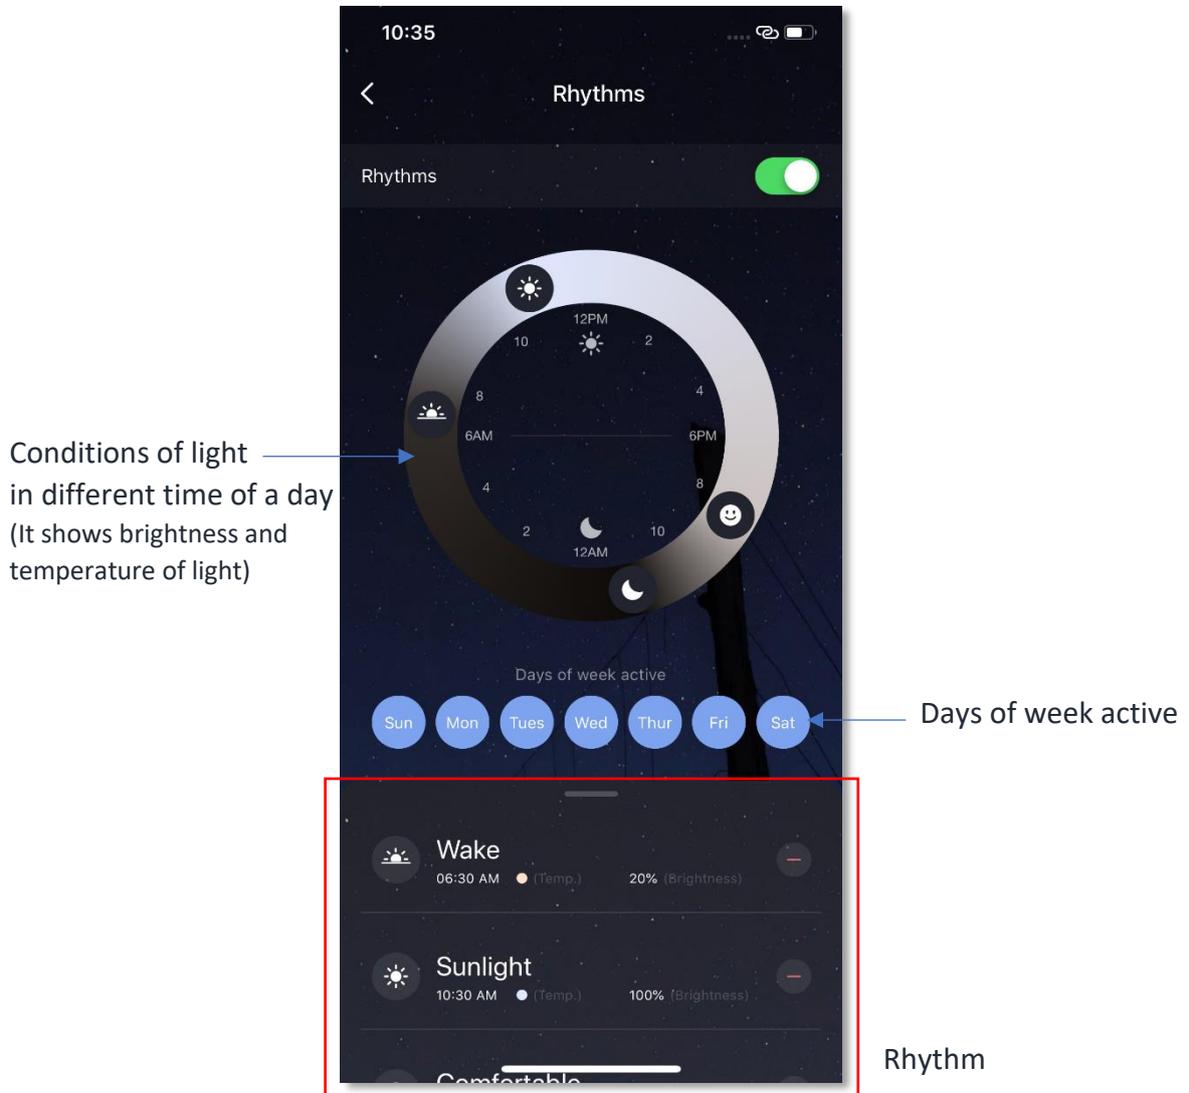


4. Tap “Add New” to add new rhythm: You can add a new rhythm into your day, you can also set the time, light temperature and brightness to match with your needs (image 3 & 4);
5. Tap “Save” to finish setting (image 4).

(image 3)

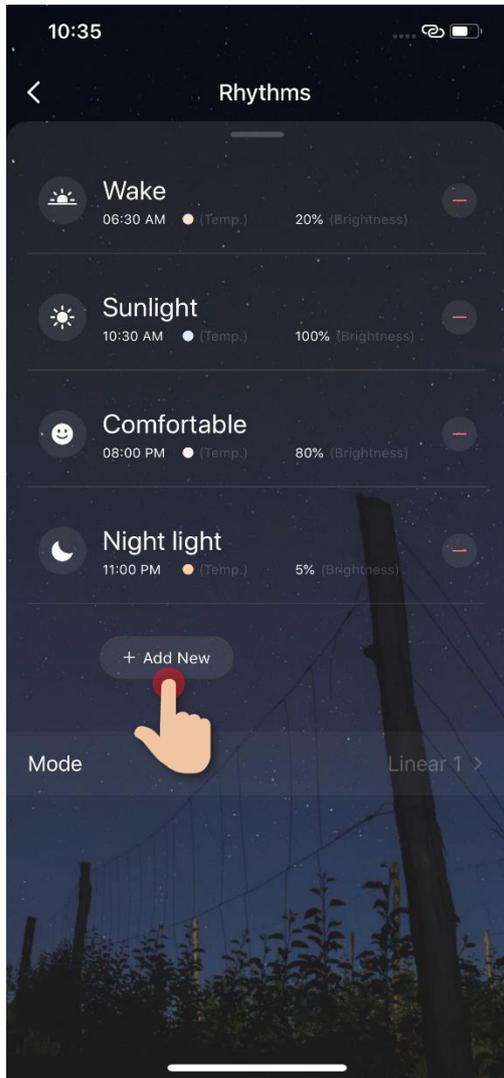

(image 4)

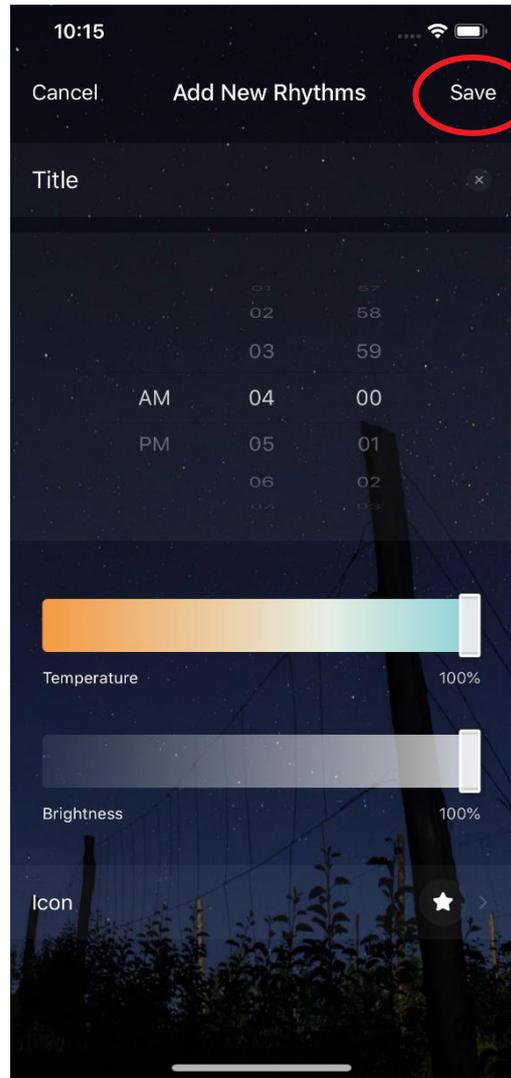


# Scene (Smart Action)

The integration of different smart devices is the beauty of smart home living which provides convenience and many possibilities of creating your preferred control settings. By setting SCENE, you can execute different smart devices at the same time by only one single tap. You can tailor make your unique scene such as movie time scene, welcome/back home scene, reading scene etc.

## User Voice Command to Turn On/Off SensePlus LED Color Bulb


Instructions below explain how to create a Scene:

1. In "Smart Action" under the page of "Scene", tap "+" to add new Scene, and then tap "Add Action"
2. Select SensePlus LED Color Bulb and tap "Switch", and then select "On". (If turn off the Air Purifier then select "Off")
3. Tap to enable "Show on Dashboard Widgets", tap "Save" on the top right corner to complete
- 4.

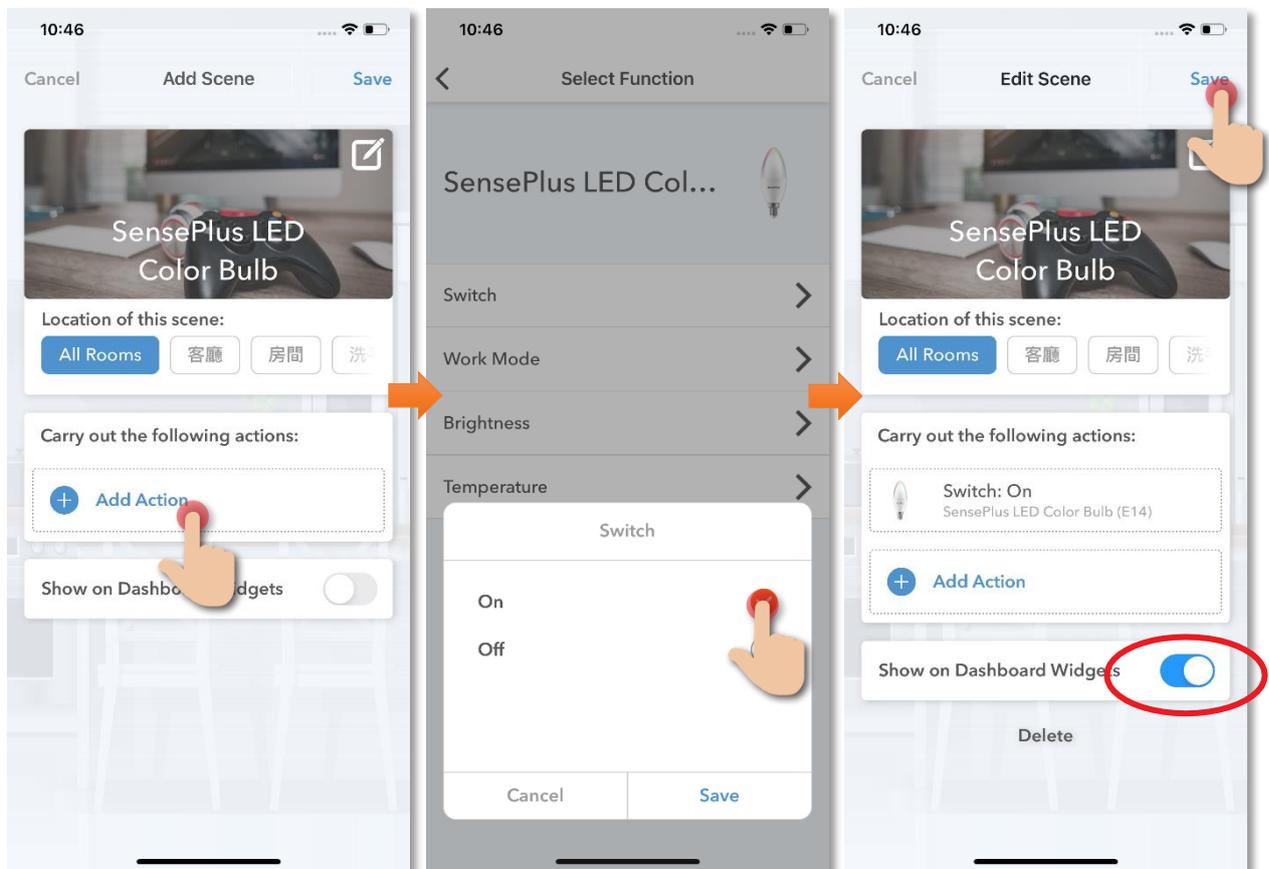

## How to add Siri Command into Scene:

1. In the page of "Scene", tap "Add to Siri"
- 2.
3. In Siri Shortcuts, select the scene you would like to add Voice command
6. Input the voice command you want and then tap "Add to Siri" to complete

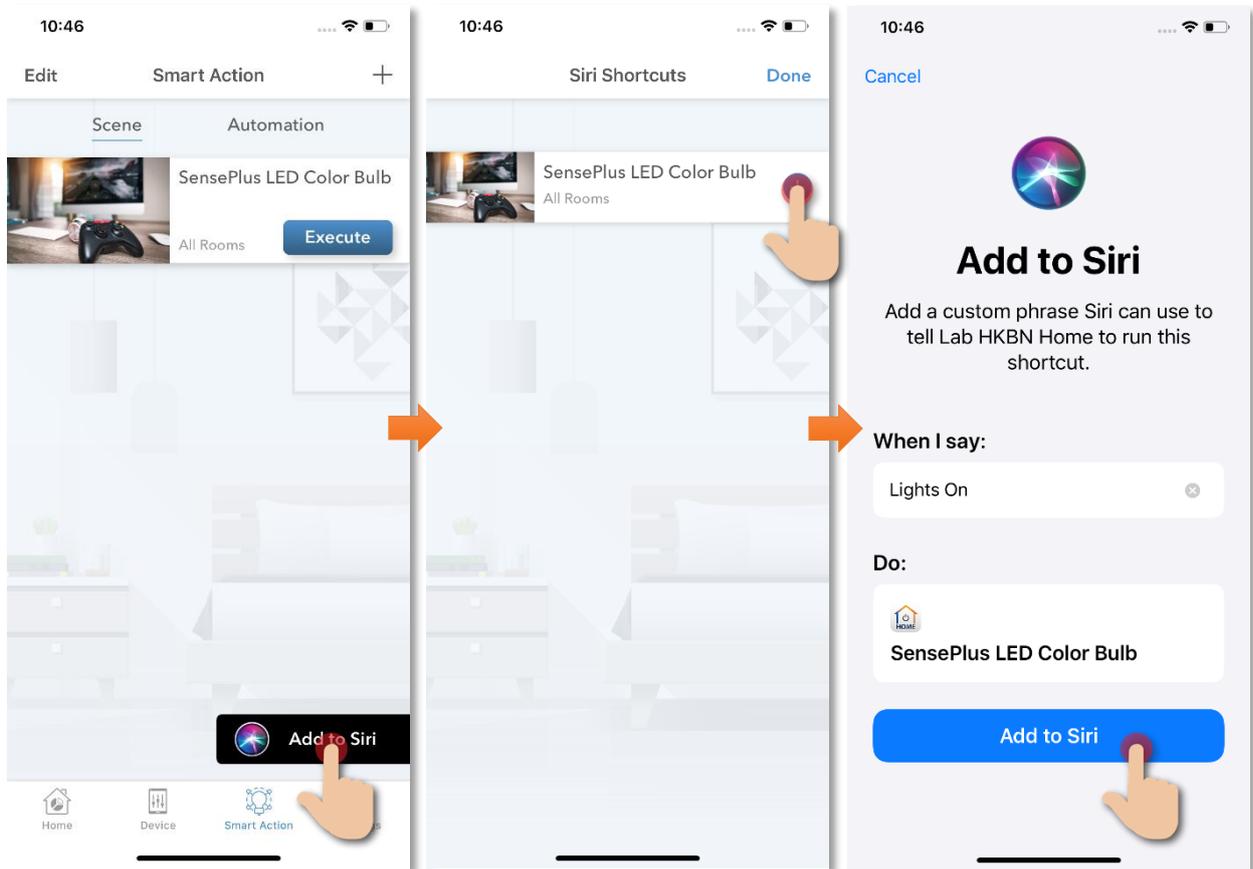


# Automation (Smart Action)

AUTOMATION can carry out device actions automatically by pre-conditions like environment factors or smart device status. You can handover this complex and important daily works to HKBN Smart for a convenient and simple living. Automation included the setting of Temperature, Humidity, Weather and Schedule as condition to trigger different control in smart devices. Below is the automation example of SensePlus LED Color Bulb:

## Turn on SensePlus LED Color Bulb at 6:00PM

Instructions below explain how to create an Automation:


1. In "Smart Action" under the page of "Automation", tap "+" to add new Automation, and then tap "Add Condition"
2. Tap "Schedule"
3. Set the time at 6:00PM

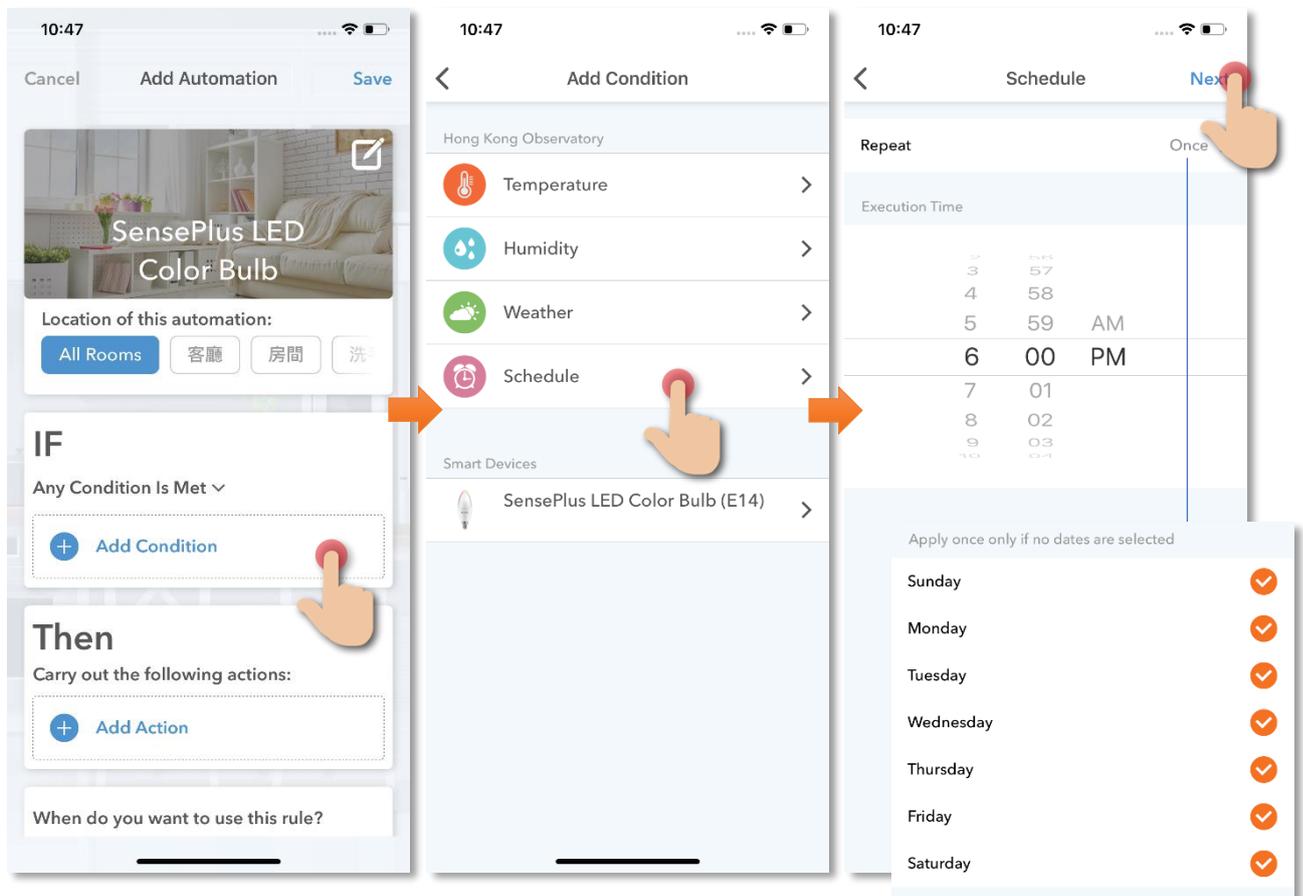


4. Tap "Add Action"

5. Select "SensePlus LED Color Bulb", then tap "On" in power.

6. Save to complete.

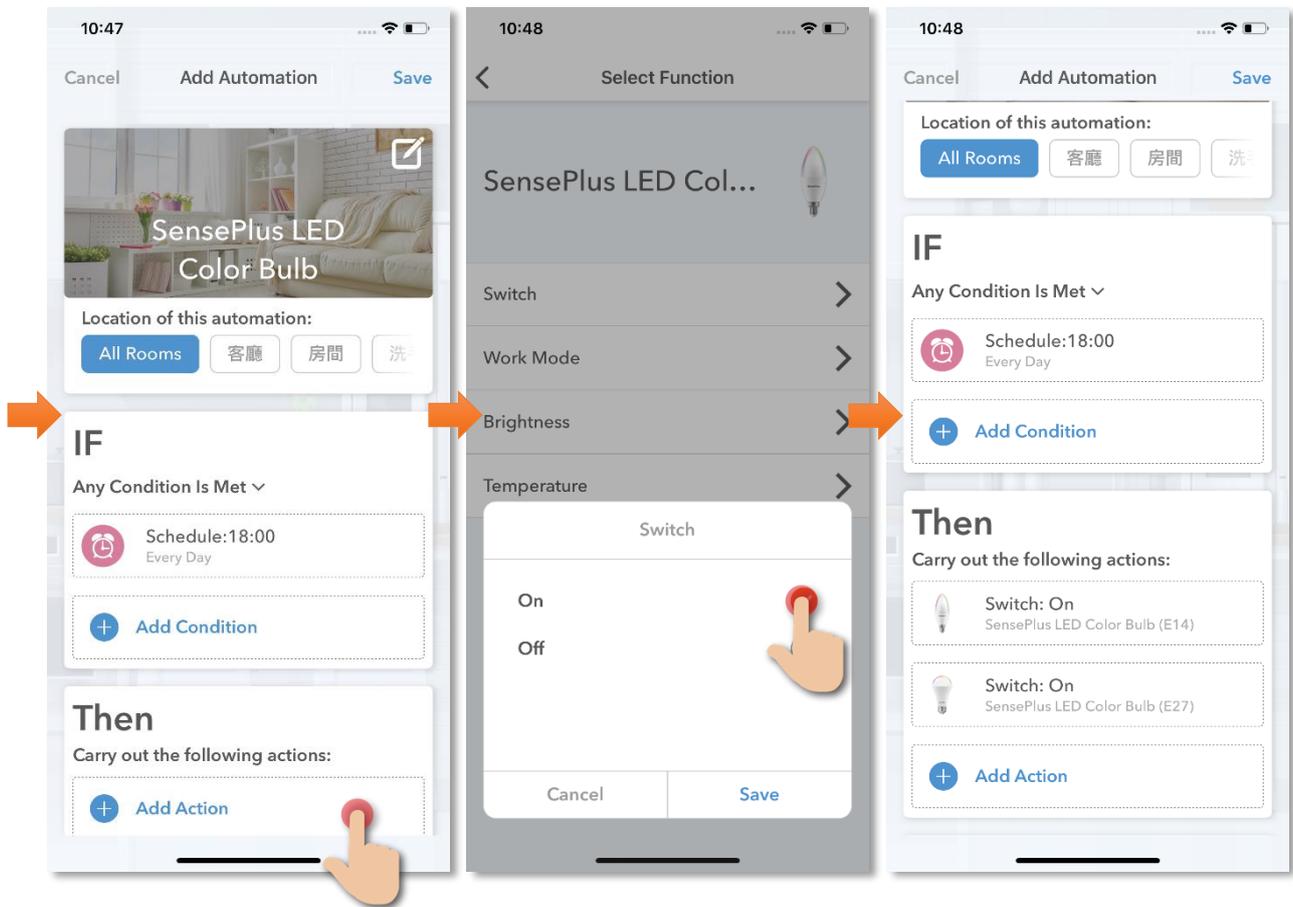


7. In the page of automation, you can enable or disable automation

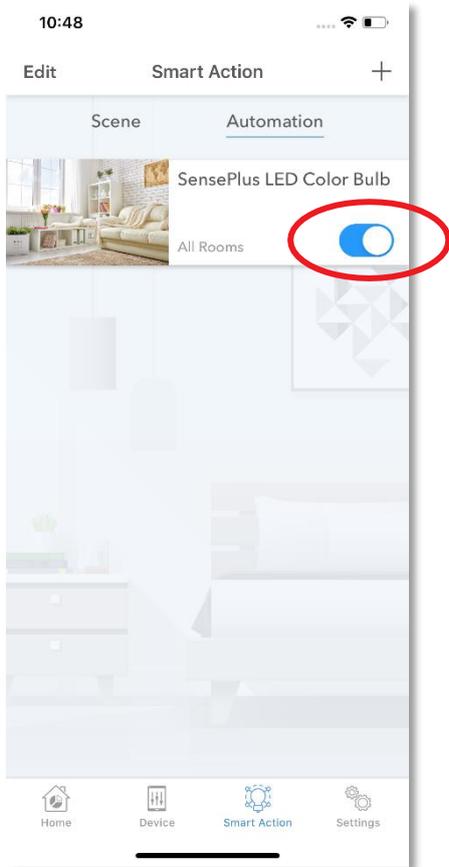


# Settings

- Page Layout

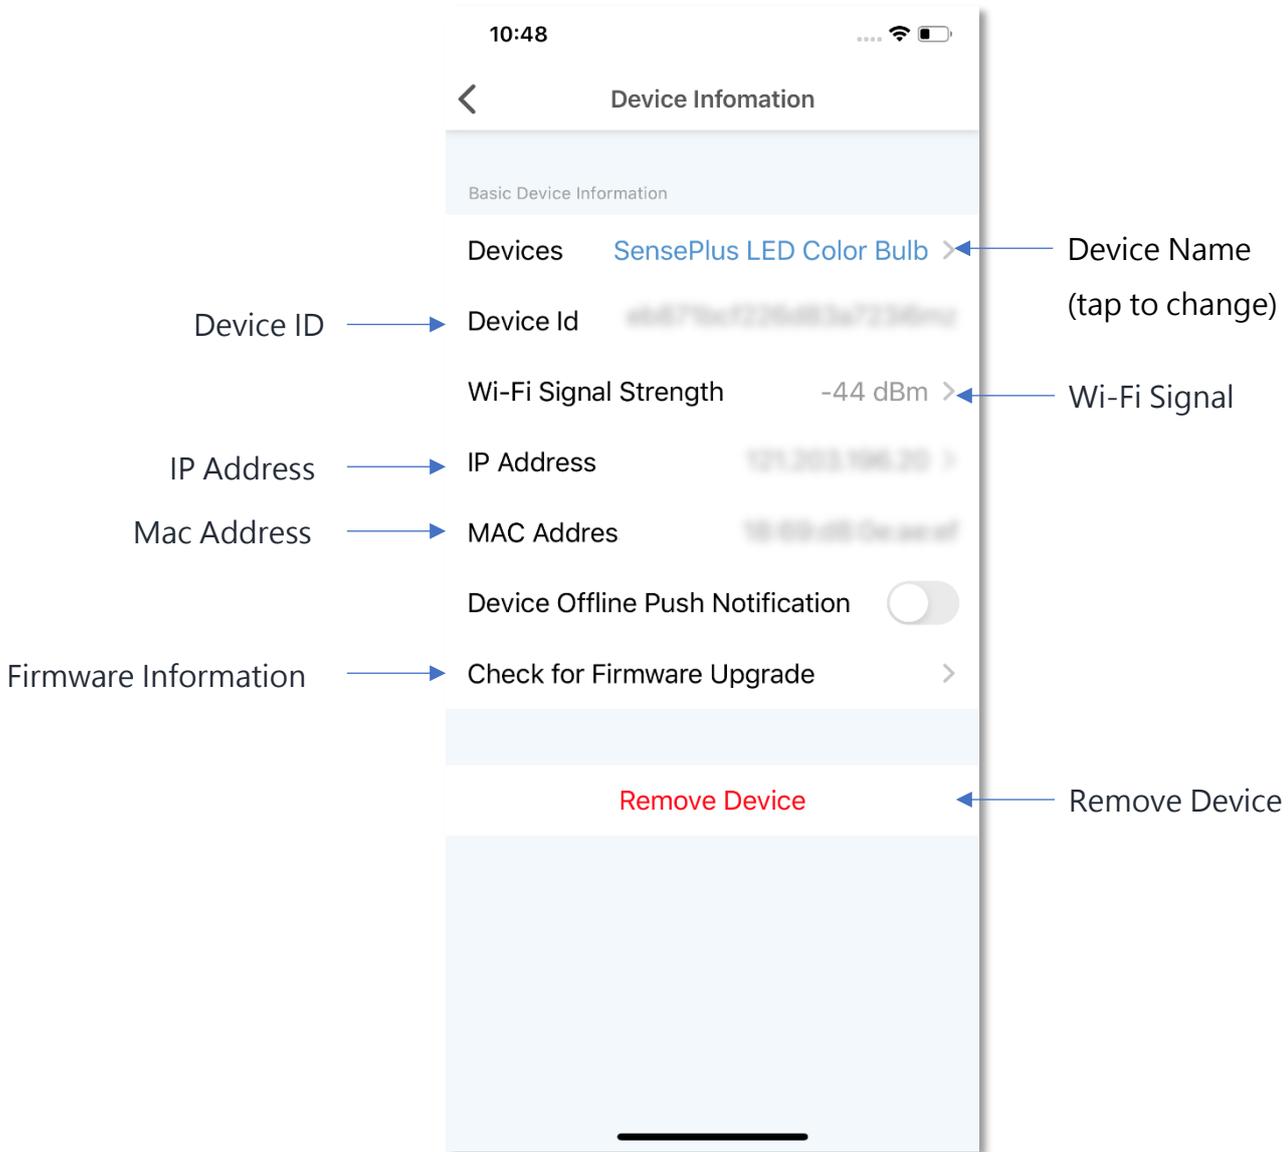


- **Check for Firmware Upgrade**

Tap “Check for Firmware Upgrade”, you can see current firmware version and available upgrade version if any. Tap “Upgrade” to start firmware upgrade

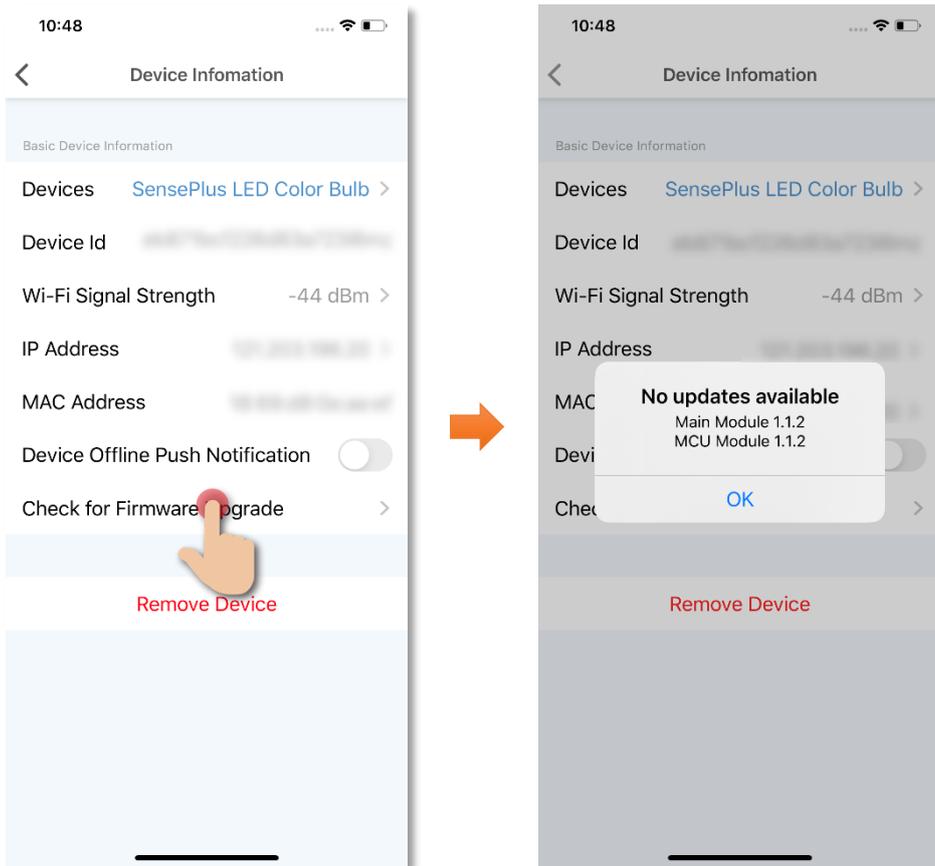

- **Remove Device**

1. In device settings page, tap “Remove Device”.
2. Tap “OK” to confirm and remove device from your account.

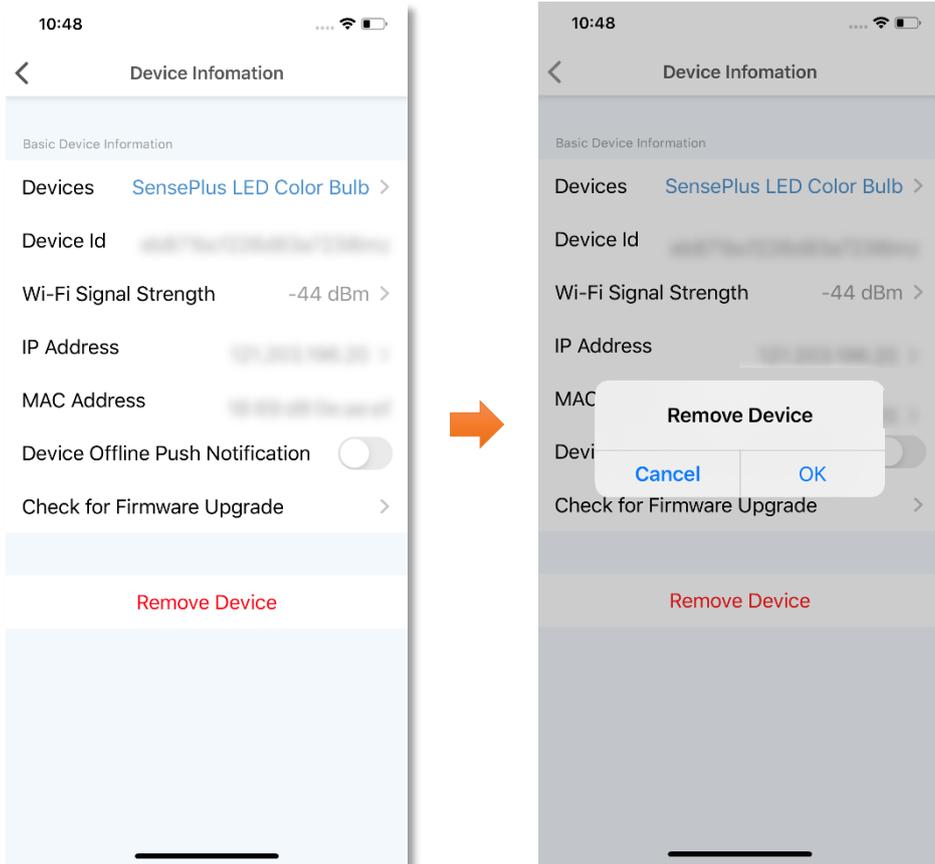

# Product Specifications

## Model: MX-LB-01

- Compliance with: CE, RoHS
- Base: E27
- Voltage: AC220-240V, 50/60Hz
- Power: 11W±10%
- Luminous Flux: 1050LM
- Beam Angle: 200°
- RA: ≥80
- Power Factor: >0.5
- Working Temperature: -10°C-40°C
- Working Humidity: 80%
- Wattage On Stand By: <0.5W
- Wi-Fi Standard: IEEE 802.11b/g/n, 2.4GHz

## Model: MX-LB-02

- Compliance with: CE, RoHS
- Base: E14
- Voltage: AC220-240V, 50/60Hz
- Power: 5W±10%
- Luminous Flux: 350
- Beam Angle: 250°
- RA: ≥80
- Power Factor: >0.5
- Working Temperature: -10°C-40°C
- Working Humidity: 80%
- Wattage On Stand By: <0.5W
- Wi-Fi Standard: IEEE 802.11b/g/n, 2.4GHz

# Product Maintenance and Warranty

For the enquiry of product maintenance and warranty, please contact the product distributor/ manufacturer below:

## Maxisense IoTech Limited

- Service Center : Room 1010, Peninsula Tower, 538 Castle Peak Road, Cheung Sha Wan, Kowloon, Hong Kong
- Tel. : (852) 3500 8222
- Email : [info@Maxisense.io](mailto:info@Maxisense.io)
- Working Hour : (Monday to Friday) 9:30am - 12:30pm, 2:00pm - 6:00pm (No service on Saturday, Sunday and Public Holiday)

If you would like to check the device on the same day, please call to make an appointment to avoid long waiting time.

Just in case the hotline is busy, please leave a voice message and your enquiry will be responded to as soon as possible.

Should you have any query, please call our Customer Service Hotline at 3492 0110.